

### Primary Characteristics


$I_o$	1.0	A
VRRM	20~40	V
IFSM	9.0	A
VF	0.45~0.9	V

### FEATURES

- High Surge Capability
- Low Power Loss, High Efficiency
- High Current Capability and Low Forward Voltage Drop
- Guard Ring Die Construction for Transient Protection

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

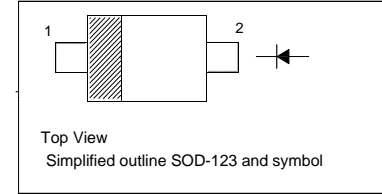





### Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C

Parameter	Symbol	PB5817W	PB5818W	PB5819W	Unit
Non-Repetitive Peak Reverse Voltage	VRM	20	30	40	V
Peak Repetitive Peak Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	VRRM VRWM VR	20	30	40	V
RMS Reverse Voltage	VR(RMS)	14	21	28	V
Average Rectified Output Current	$I_o$	1.0			A
Peak Forward Surge Current @t=8.3ms	IFSM	9			A
Repetitive Peak Forward Current	IFRM	1.5			A
Power Dissipation	Pd	500			mW
Thermal Resistance Junction to Ambient	RθJA	250			°C/W
Storage Temperature	TSTG	-55~+150			°C

### ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	V(BR)	IR= 1mA			V
		PB5817W	20		
		PB5818W PB5819W	30 40		
Reverse voltage leakage current	IR	VR=20V		1	mA
		PB5817W			
		PB5818W PB5819W			
Forward voltage	VF	PB5817W	IF=1A	0.45	V
			IF=3A	0.75	
		PB5818W	IF=1A	0.55	V
			IF=3A	0.875	
		PB5819W	IF=1A	0.6	V
			IF=3A	0.9	
Diode capacitance	C <sub>D</sub>	VR=4V, f=1MHz		120	pF

### Typical Characteristics PB5817W

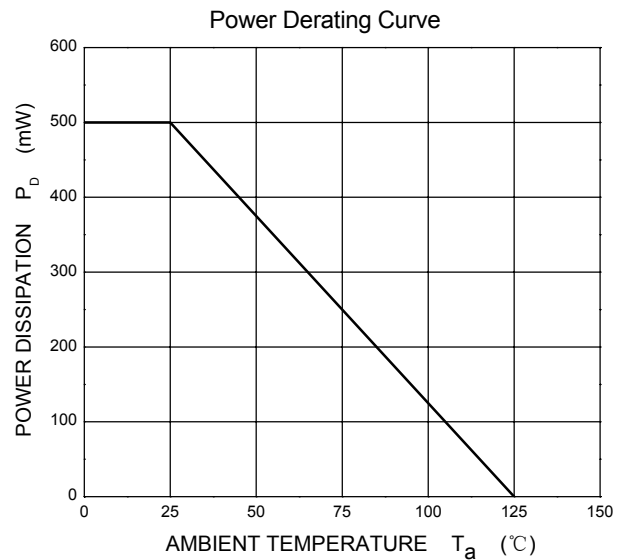
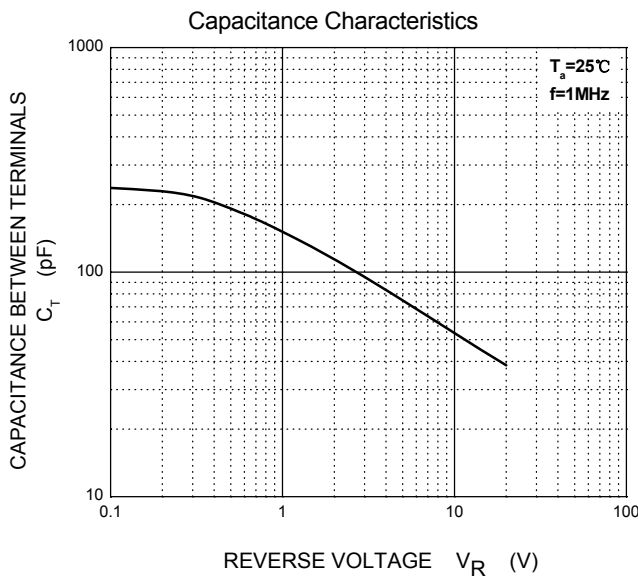
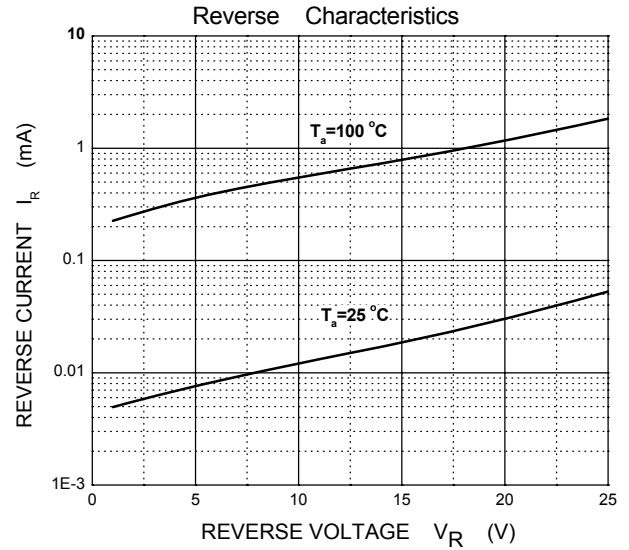
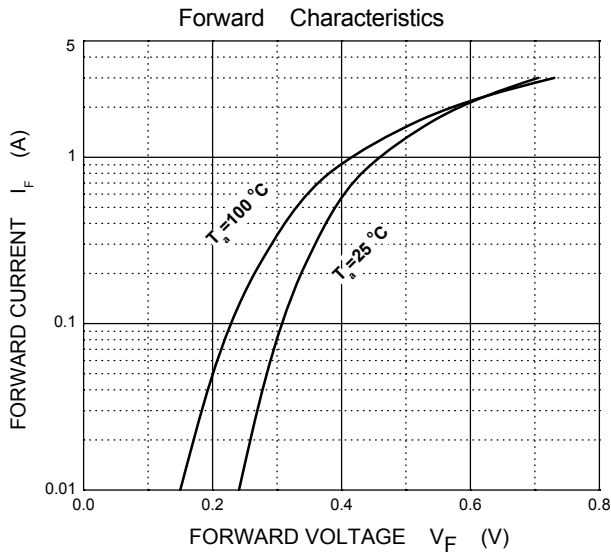




# PB5817W THRU PB5819W

SOD-123 Plastic-Encapsulate Diodes  
SCHOTTKY BARRIER DIODE

## Typical Characteristics PB5818W

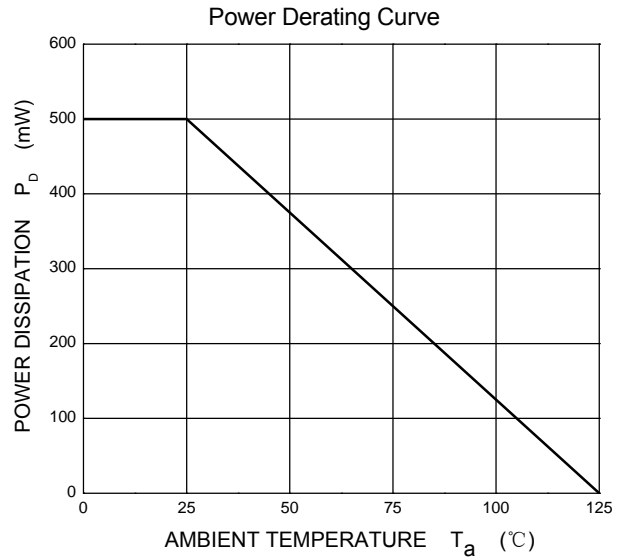
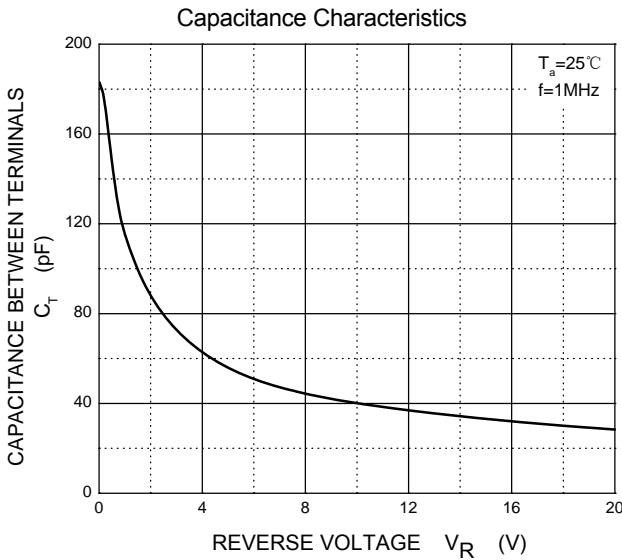
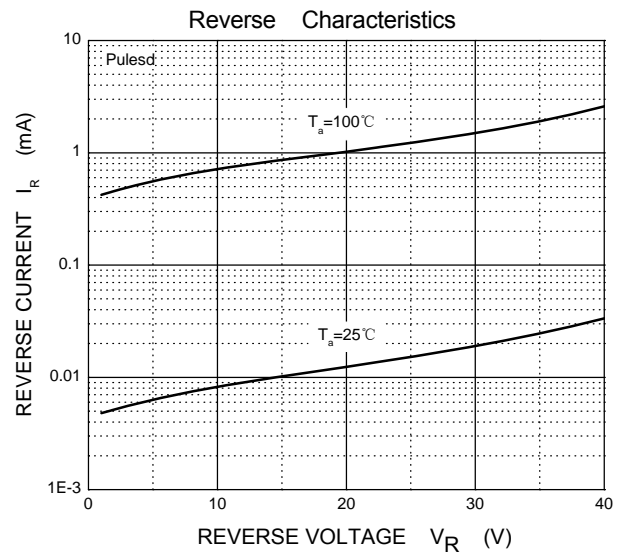
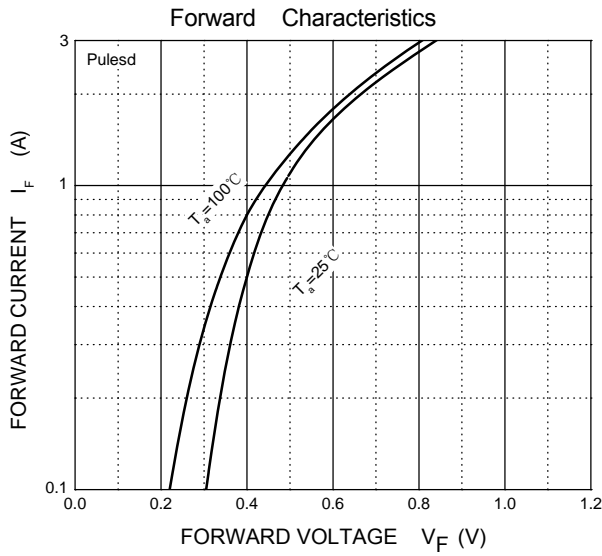




# PB5817W THRU PB5819W


SOD-123 Plastic-Encapsulate Diodes  
SCHOTTKY BARRIER DIODE

## Typical Characteristics PB5819W

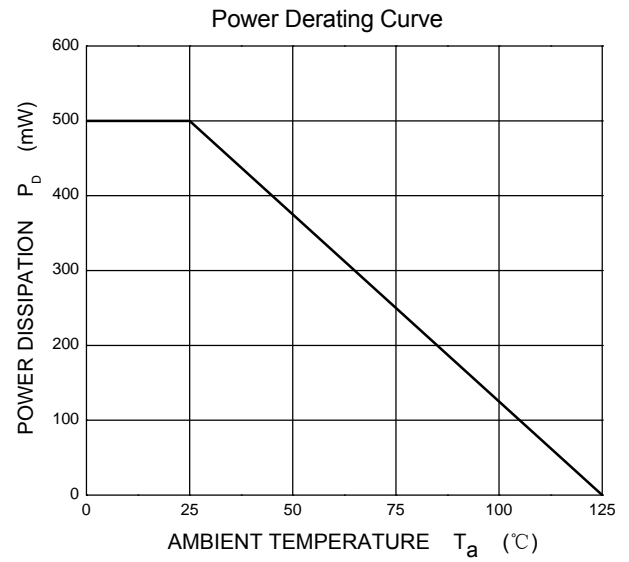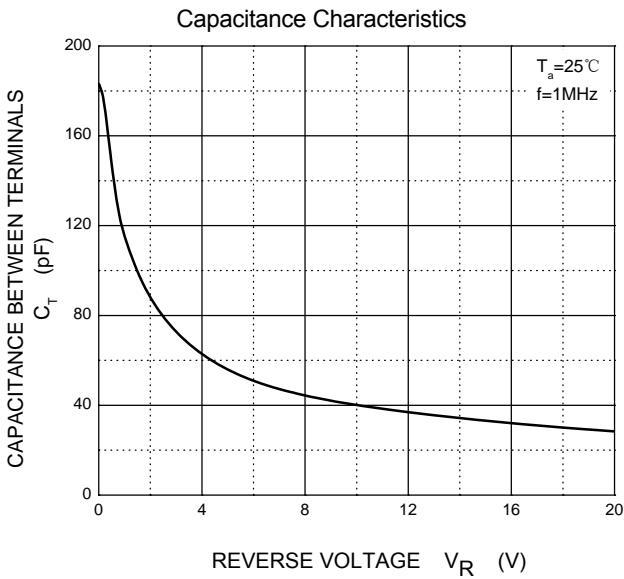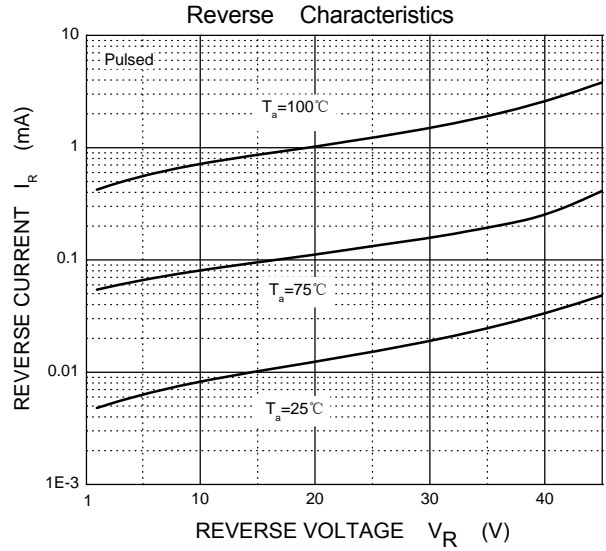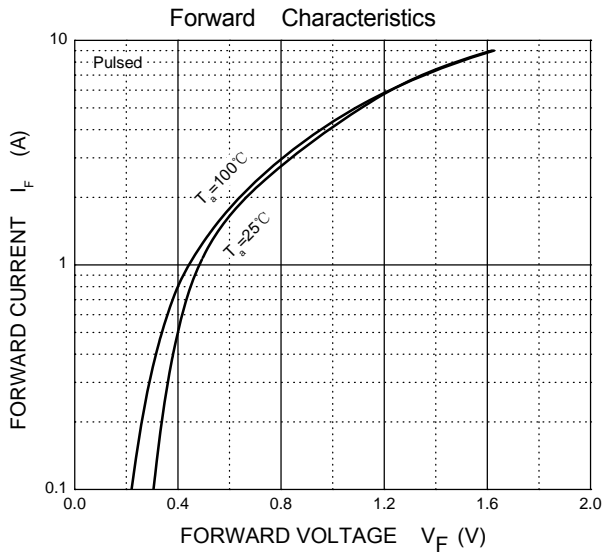

### SOD123 PCKAGE OUTLINE



Plastic surface mounted package : 2 leads

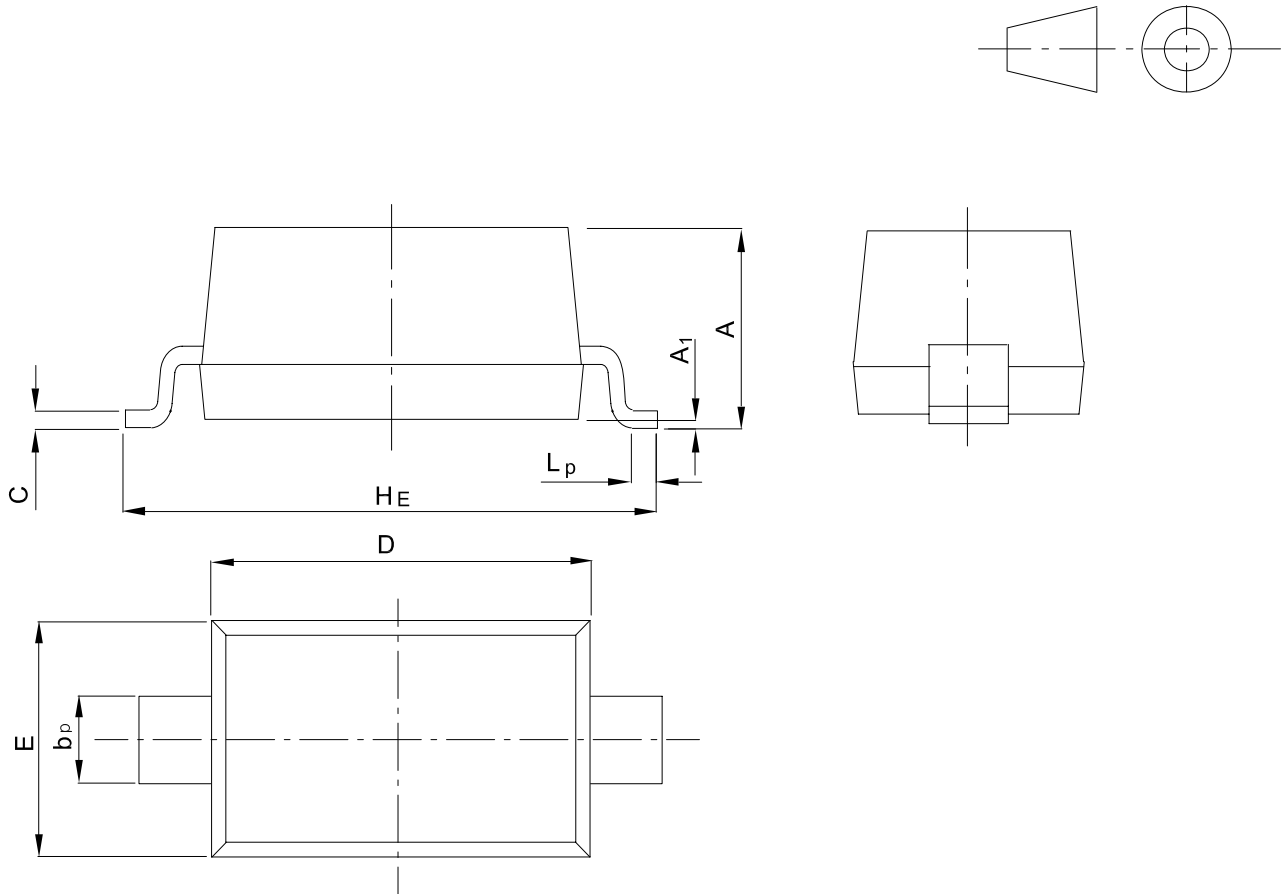


UNIT	A	bp	C	D	E	HE	A1	Lp
mm	1.20	0.60	0.135	2.75	1.65	3.85	0.10	0.50
	0.90	0.50	0.100	2.55	1.55	3.55	0.01	0.20

### Packaging Specifications


ÚÀÀ Æ^Á	Y Á G { DÁ	ÓÁ G { DÁ	ÓÁ G { DÁ	ÓÁ G { DÁ	áFÁ G { DÁ	áÁ G { DÁ	ÒÁ G { DÁ	ÒÁ G { DÁ	ÚÁ G { DÁ	ÚeÁ G { DÁ	ÚFÁ G { DÁ	VÁ G { DÁ
ÚÚÖËGH	ìíëä	ëèééá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚÚÖËGH-ØS	ìíëä	ëèééá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚÚÖËGH-PÒ	ìíëä	ëèééá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚÚÖËGH	ìíëä	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚÚÖËGH-ØS	ìíëä	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚÚÖËGH-PÒ	ìíëä	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚT ØØ	FG ééá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚT ØØÙ	FG ééá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá
ÚT ØØPÒ	FG ééá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá	èëííëéá

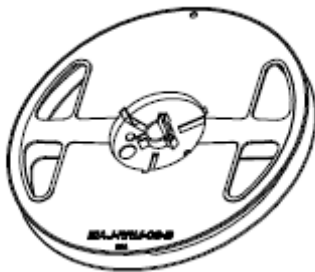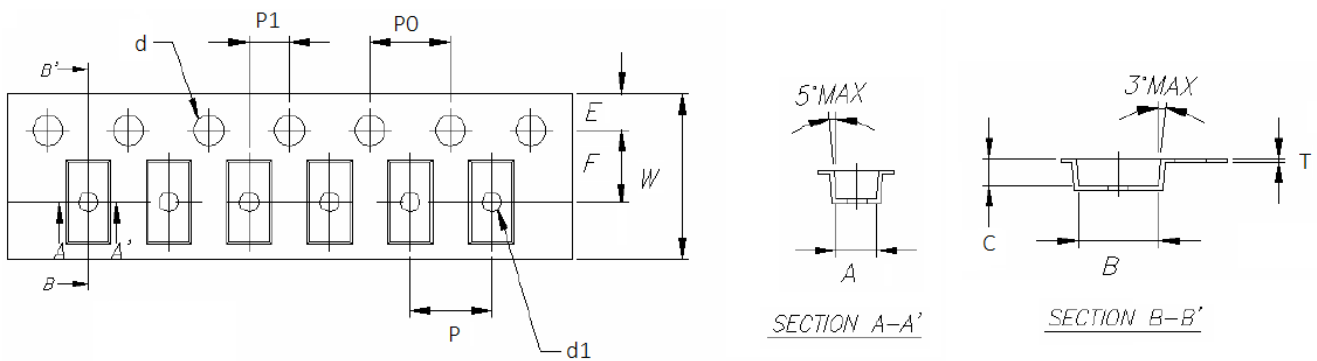

Package	D (max.) (mm)	D1 (min.) (mm)	D2 (mm)	G (min.) (mm)	W1 (min.) (mm)
SOD-123	178	50.0	13.0±0.2	8.4	11.4
SOD-123FL	178	50.0	13.0±0.2	8.4	11.4
SOD-123HE	178	50.0	13.0±0.2	8.4	11.4
SOD-323	178	50.2	13.0±0.2	8.0	11.5
SOD-323FL	178	50.2	13.0±0.2	8.0	11.5
SOD-323HE	178	50.0	13.0±0.2	8.4	11.4
SMAF	178	50.0	13.0±0.2	12.4	18.0
	330	50.0	13.0±0.2	12.4	18.0
SMA-S	178	50.0	13.0±0.2	12.4	18.0
SMA-HE	178	50.0	13.0±0.2	12.4	18.0

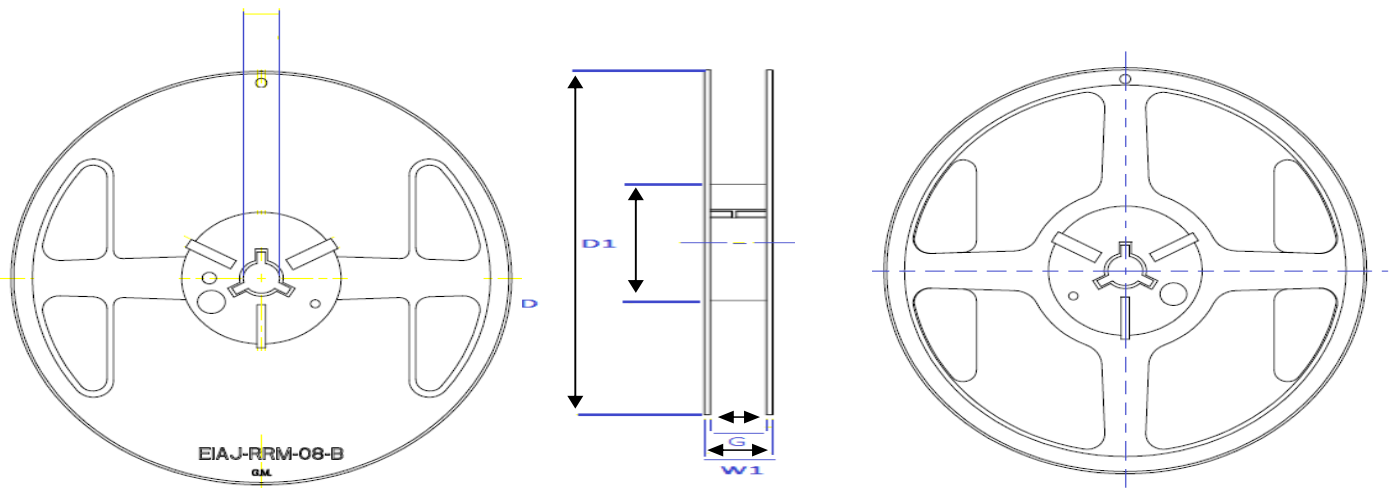

### Recommend IR Reflow Soldering Thermal Profile

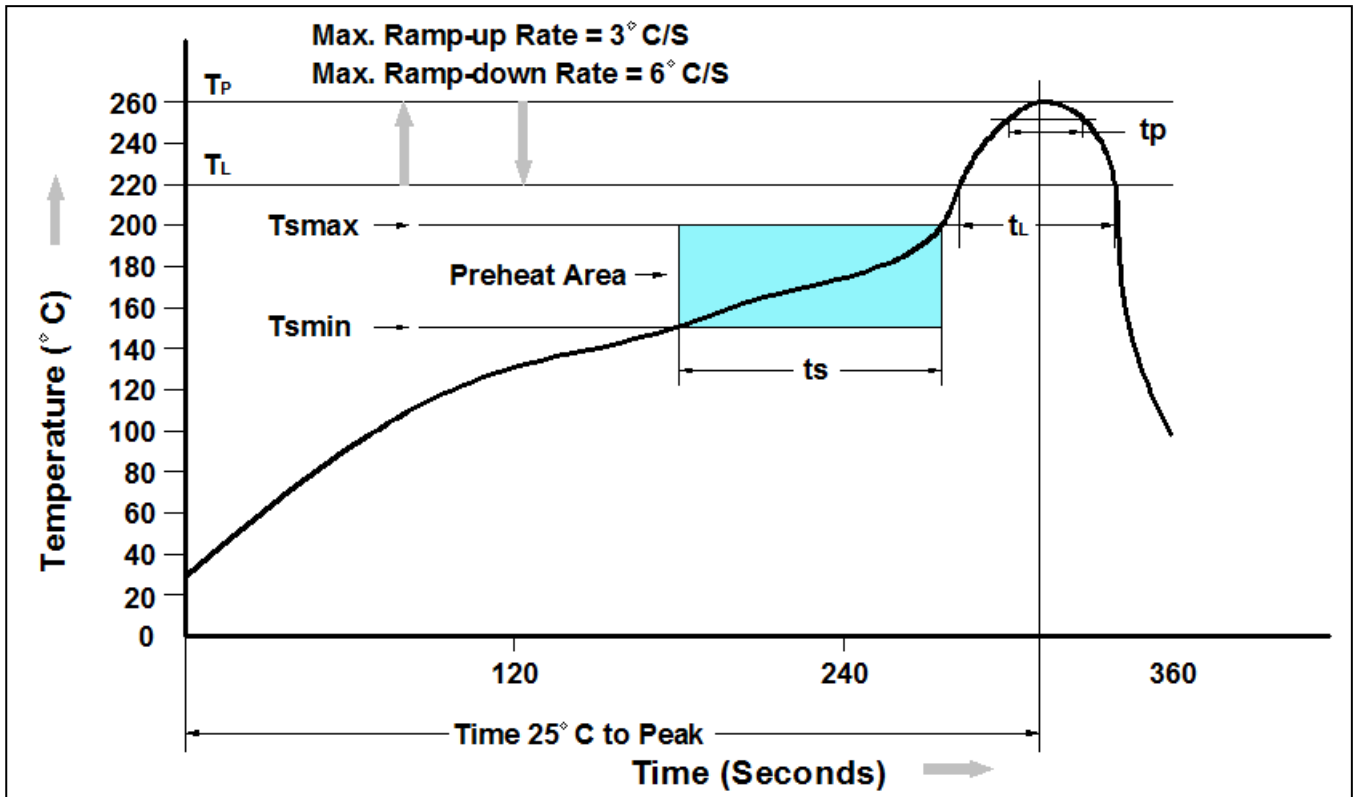

Profile Feature	Pb-Free Assembly Profile
Temperature Min. ( $T_{smin}$ )	150°C
Temperature Max. ( $T_{smax}$ )	200°C
Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ )	60-120 seconds
Average Ramp-up Rate ( $t_L$ to $t_p$ )	3°C/second max.
Liquidous Temperature ( $T_L$ )	217°C
Time ( $t_L$ ) Maintained Above ( $T_L$ )	60 – 150 seconds
Peak Temperature	260°C +0°C / -5°C
Time ( $t_p$ ) within 5°C of actual Peak Temperature	30 seconds
Ramp-down Rate ( $T_P$ to $T_L$ )	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

### Ordering Information

Part Number	Description	Quantity
PB5817W~PB5819W	SOD-123 Reel	3000 pcs

## DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operating ranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.